


## DATASHEET

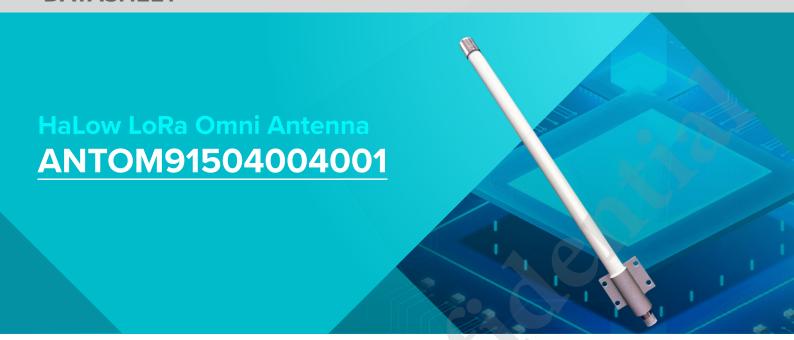

## **Electrical Data**

Frequency	900~930 MHz
Gain	5dBi
VSWR	≤2.0
Polarization	Vertical
Impedance	50Ω
Connector Type	1 Port, N-Type Female
Temperature	-55° to +60° C (-67° to +140° F)
Color	White
Weight	400g
Material	Fiberglass
Max power	50w