

DATASHEET

Universal HaLow Meter Module AWMHU5-001

A versatile IoT solution integrating
Wi-Fi HaLow wireless technology




Description

A versatile IoT solution integrating Wi-Fi HaLow wireless technology.

- **Wi-Fi HaLow Chipset :** Morse Micro MM6108
- **Power Supply :** DC 5V
- **Security Protocols :** 64/128-bit WEP, TKIP, WPA, WPA2, AES, WPS
- **Operating Mode :** Client
- **Wireless Standard :** IEEE 802.11ah
- **Microcontroller :** STM32U5x5CI, running at 160 MHz
- **Core Architecture :** Arm® 32-bit Cortex®-M33 CPU with TrustZone®, MPU, DSP, and FPU
- **Model Number :** AWMHU5-001

Features

- **Optimized Data Exchange :**
Utilizes a UART interface for streamlined and efficient communication.
- **Seamless Device Integration :**
Designed for easy configuration and connection, with flexible GPIOs to support a wide range of applications.
- **Extended Battery Life :**
Engineered for low power consumption, ensuring battery longevity of at least five years under typical usage—ideal for remote or hard-to-access installations.
- **Long-Range Connectivity :**
Leverages Wi-Fi HaLow's extended range and high-capacity transmission, enabling reliable sharing of images and video over long distances.
- **Simplified Configuration :**
Dual-purpose Pin 10 (DP) and Pin 12 (DM) function as both USB Data Plus/Minus lines and HaLow configuration pins for effortless setup.

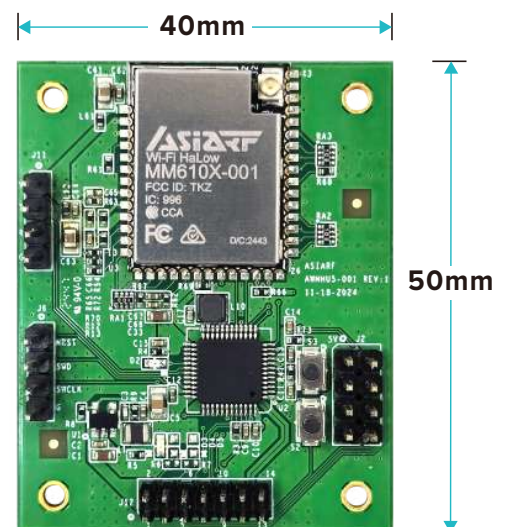

For more detailed information, please contact our sales team: sales@asiarf.com / +886 2 2940 7880

Copyright © AsiaRF All rights reserved. While every effort is made to ensure the information is accurate, AsiaRF does not accept liability for any errors or mistakes that may arise.

All specifications are subject to change without notice. AsiaRF Co., Ltd. | www.asiarf.com | +886 2 2940-7880 | sales@asiarf.com | Last Updated: 6/06/2025

