

DATASHEET

Wi-Fi HaLow Sub-GHz Wireless Module

MM610X-001



Federal
Communications
Commission



1. Description


MM610X-001 is a **Wi-Fi HaLow Sub-GHz wireless module** based on the **Morse Micro® MM6108 RF SOC**. HaLow is a low-power, long-range version of the IEEE 802.11ah Wi-Fi standard, designed for IoT applications.

The module operates Sub-GHz and offers longer range and lower power connectivity. It complies with the Wi-Fi Alliance 802.11ah specification and is **Wi-Fi CERTIFIED HaLow™**. It provides excellent RF performance, with high sensitivity, selectivity, and blocking performance. The module also features a U.FL connector for an external Sub-GHz antenna.

It offers various IO interfaces including UART, SDIO, SPI, I2C, and GPIOs for PWM and switch functions. The module supports communication up to 2 kilometers Line of Sight (LOS), making it suitable for both indoor and outdoor IoT applications.

The MM610X-001 module delivers a UDP throughput of 20Mbps, offering superior capacity compared to other long-distance wireless IoT solutions. Its PHY data rate is 32.5Mbps. The module is certified with FCC, IC, CE, TELEC, NCC, and RCM.

In summary, the MM610X-001 module provides reliable and long-range connectivity for IoT applications, with excellent RF performance, versatile IO interfaces, and high throughput capabilities.

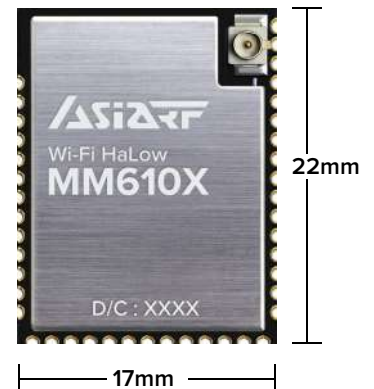

Wi-Fi CERTIFIED HaLow™ for IoT

Features

- Sub-1 GHz spectrum operation
- Narrow band OFDM channels
- Several device power saving modes
- Native IP support
- Latest Wi-Fi® security

Benefits

- Long range: approximately 1 km
- Penetration through walls and other obstacles
- Supports coin cell battery devices for months or years
- No need for proprietary hubs or gateways

Wi-Fi HaLow 11ah related reading:

[Discover Wi-Fi CERTIFIED HaLow - Wi-Fi Alliance](#)

[IEEE 802.11ah - Wikipedia](#)

For more detailed information, please contact our sales team: sales@asiarf.com / +886 2 2940 7880

Copyright © AsiaRF All rights reserved. While every effort is made to ensure the information is accurate, AsiaRF does not accept liability for any errors or mistakes that may arise.

All specifications are subject to change without notice. AsiaRF Co., Ltd. | www.asiarf.com | +886 2 2940-7880 | sales@asiarf.com | Last Updated: 11/14/2025





Wi-Fi HaLow Sub-GHz Wireless Module

MM610X-001

2. Features

Protocol

- 802.11ah OFDM PHY supporting future WFA HaLow certification
- BPSK & QPSK, 16-QAM & 64-QAM Modulation
- Automatic frequency & gain control
- Packet detect & channel equalization
- Forward Error Correction (FEC) coding & decoding
- Supports Modulation and Coding Scheme (MCS) levels MCS 0-7 and MCS 10
- Supports 1MHz and 2MHz duplicate modes.
- Support for Traveling Pilots
- 802.11ah MAC supporting WFA HaLow certification
- Support for STA and AP roles
- Listen-Before-Talk (LBT) access with energy detect
- 802.11 power save
- 802.11 fragmentation and defragmentation
- Power-Saving Target Wake Time (TWT) support for long battery life
- Automatic and manual MCS rate selection

Radio Operation

- Single-stream max data rate of 32.5 Mbps (MCS=7, 64-QAM, 8MHz channel, 4 μ s GI)
- Radio supporting worldwide Sub-1 GHz frequency bands
- Frequency Range: 850-950 MHz
- Channel width options of 1/2/4/8 MHz

Transmitter Performance

- Tx output power (dBm): +21 dBm (Typical) @MCS0

RF Interface

- External antenna connector

Power Consumption

- 37 mA RX current @ Listen
- 40 mA RX current @ Active Receive

Power Management Unit (PMU) for various modes of operation

- Power-down (interrupt driven wake)
- Hibernate mode (internal / external wake)
- Target Wake Time mode
- Active Receive / Transmit mode
- Integrated DC-DC converter supports a wide supply voltage, from 1.8V to 3.6V

Dimensions

- 22 mm \pm 10% x 17.0 mm \pm 10% x 2.9 mm \pm 10% (module)

Security

- AES encryption engine
- Hardware support for SHA1 and SHA2 hash functions (SHA-256, SHA-384, SHA-512)
- WPA3 including protected management frames (PMF)
- Opportunistic Wireless Encryption (OWE)

Additional information

- Weight : 1.5g



Wi-Fi HaLow Sub-GHz Wireless Module

MM610X-001

MCU Peripherals

- 12-bit 1 Msps SAR ADC
- 12 × GPIO
- 3 × UART, 1 × SPI, 1 × I2C
- 2 × 16-bit Timer/Counter
- 1 × 32-bit Timer/Counter
- 32-bit Real Time Counter
- 24-bit Low Energy Timer for waveform generation
- 2 × Watchdog Timer
- Power Management Unit for power state switching
- SDIO 2.0 compliant slave interface
- SDIO 2.0 Default Speed (DS) at 25MHz
- SDIO 2.0 High Speed (HS) at 50MHz
- Support for both 1-bit and 4-bit data mode
- Support for SPI mode operation

Regulatory Certifications

- FCC : TKZMM610X-001
- IC : 9968A-MM610X001
- TELEC : 217-231135
- NCC : CCAF23Y10110T6
- CE
- RCM
- ESD: HBM 2KV / MM 200V, Latch-up: 150mA
- Halogen-free / RoHS 2.0 / Reach Annex 14 & 17

Marking Information Indicator

