

DATASHEET

Micro SD Converter Card for Wi-Fi HaLow Module

MM610X-CS1



Federal
Communications
Commission




1. Description

MM610X-CS1 is a Wi-Fi HaLow Sub-GHz wireless module based on the Morse Micro® MM6108 RF SOC. HaLow is a low-power, long-range version of the IEEE 802.11ah Wi-Fi standard, designed for IoT applications.

The module operates Sub-GHz and offers longer range and lower power connectivity. It complies with the Wi-Fi Alliance 802.11ah specification and is Wi-Fi CERTIFIED HaLow™. It provides excellent RF performance, with high sensitivity, selectivity, and blocking performance. The module also features a U.FL connector for an external Sub-GHz antenna.

The MM610X-001 module delivers a UDP throughput of 20Mbps, offering superior capacity compared to other long-distance wireless IoT solutions. Its PHY data rate is 32.5Mbps. The module is certified with FCC, IC, CE, TELEC, NCC, and RCM.

In summary, the MM610X-001 module provides reliable and long-range connectivity for IoT applications, with excellent RF performance, versatile IO interfaces, and high throughput capabilities.

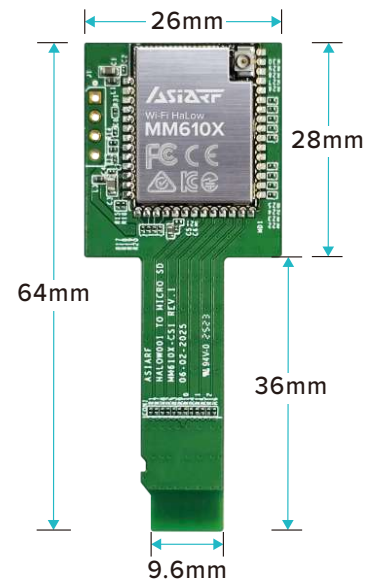

Wi-Fi CERTIFIED HaLow™ for IoT

Features

- Sub-1 GHz spectrum operation
- Narrow band OFDM channels
- Several device power saving modes
- Native IP support
- Latest Wi-Fi® security

Benefits

- Long range: approximately 1 km
- Penetration through walls and other obstacles
- Supports coin cell battery devices for months or years
- No need for proprietary hubs or gateways

Wi-Fi HaLow 11ah related reading:

Discover Wi-Fi CERTIFIED HaLow - Wi-Fi Alliance
IEEE 802.11ah - Wikipedia

For more detailed information, please contact our sales team: sales@asiarf.com / +886 2 2940 7880

Copyright © AsiaRF All rights reserved. While every effort is made to ensure the information is accurate, AsiaRF does not accept liability for any errors or mistakes that may arise.

All specifications are subject to change without notice. AsiaRF Co., Ltd. | www.asiarf.com | +886 2 2940-7880 | sales@asiarf.com | Last Updated: 7/14/2024

