

DATASHEET

M.2 A-E key to M.2 B/M key adapter

ACM2BM-2E1-2

(Jetson Applicable)



Description


The **ACM2BM-2E1 (Rev.2)** allows devices with M.2 E Key or A-E key interface (typically used for Wi-Fi, Bluetooth, and other wireless modules with PCIe signal) to be connected to a host with an M.2 B/M Key slot (typically used for PCIe/NVMe SSD with PCIe signal).

This adapter is ideal for systems that only provide SSD slot but require support for Wireless modules.

The USB signal required by Bluetooth can come from the B key golden finger or be introduced externally.



6.5mm

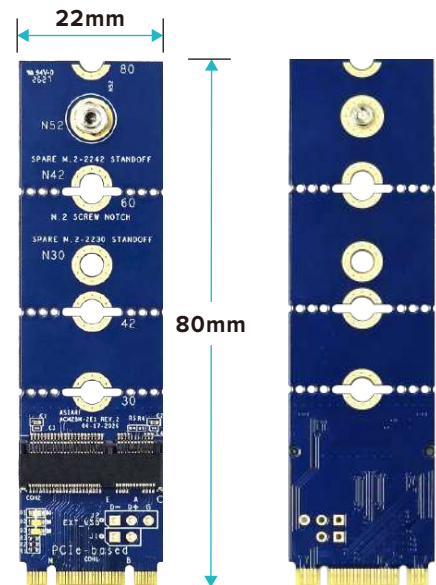

Feature

- **High-quality PCB** for stable signal transmission

For more detailed information, please contact our sales team: sales@asiarf.com / +886 2 2940 7880

Copyright © AsiaRF All rights reserved. While every effort is made to ensure the information is accurate, AsiaRF does not accept liability for any errors or mistakes that may arise.

All specifications are subject to change without notice. AsiaRF Co., Ltd. | www.asiarf.com | +886 2 2940-7880 | sales@asiarf.com | Last Updated: 7/23/2026

