

DATASHEET

M.2 A-E key to M.2 B/M key adapter

ACM2BM-2E1-2

(Jetson Applicable)




Description

The **ACM2BM-2E1 (Rev.2)** allows devices with M.2 E Key or A-E key interface (typically used for Wi-Fi, and other wireless modules with PCIe signal) to be connected to a host with an M.2 B/M Key slot (typically used for PCIe/NVMe SSD with PCIe signal).

This adapter is ideal for systems that only provide SSD slot but require support for Wireless modules.

The USB signal required by Bluetooth can come from the B key golden finger or be introduced externally.

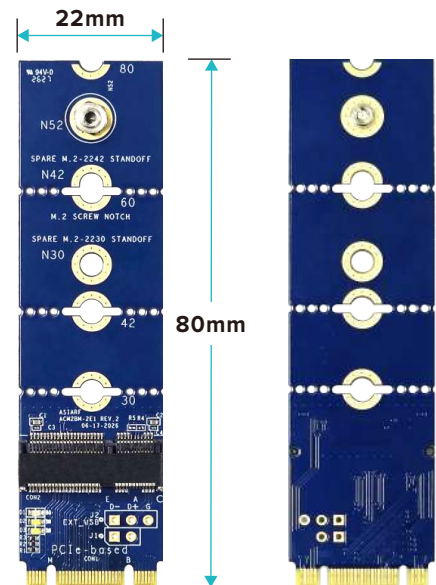

Feature

- **High-quality PCB** for stable signal transmission